


TrilliumSeries™ Adiabatic Condenser

ENGINEERING DATA



Model	Fan Qty	Tons ⁽¹⁾	Motor HP ⁽²⁾	Unit Length (L)	Unit Width (W)	Unit Height (H)	Operating Weight (lbs)
TSDC-xxx-3	1	15-27	3.0	5'-3"	4'-2"-5'7"	7'-0"	1,500-1,990
TSDC-xxx-6.2	2	26-45	6.2	7'-11"	4'-2"-5'7"	7'-0"	2,000-2,690
TSDC-xxx-9.6	3	37-65	9.6	11'-1"	4'-2"-5'7"	7'-0"	2,600-3,500
TSDC-xxx-12.4	4	51-90	12.4	15'-7"	4'-2"-5'7"	7'-1/2"	3,570-4,560
TSDC2-xxx-12.4	4	54-108	12.4	10'-2"	7'-10"	8'-2"	4,000
TSDC2-XXX-18.6	6	82-164	18.6	14'-1"	7'-10"	8'-2"	5,600
TSDC2-XXX-24.8	8	107-214	24.8	18'-1"	7'-10"	8'-2"	7,000
TSDC2-xxx-31.0	10	134-268	31.0	22'-0"	7'-10"	8'-2"	9,150
TSDC2-xxx-37.2	12	160-320	37.2	25'-11"	7'-10"	8'-2"	10,500
TSDC2-xxx-43.4	14	188-376	43.4	29'-10"	7'-10"	8'-2"	12,400

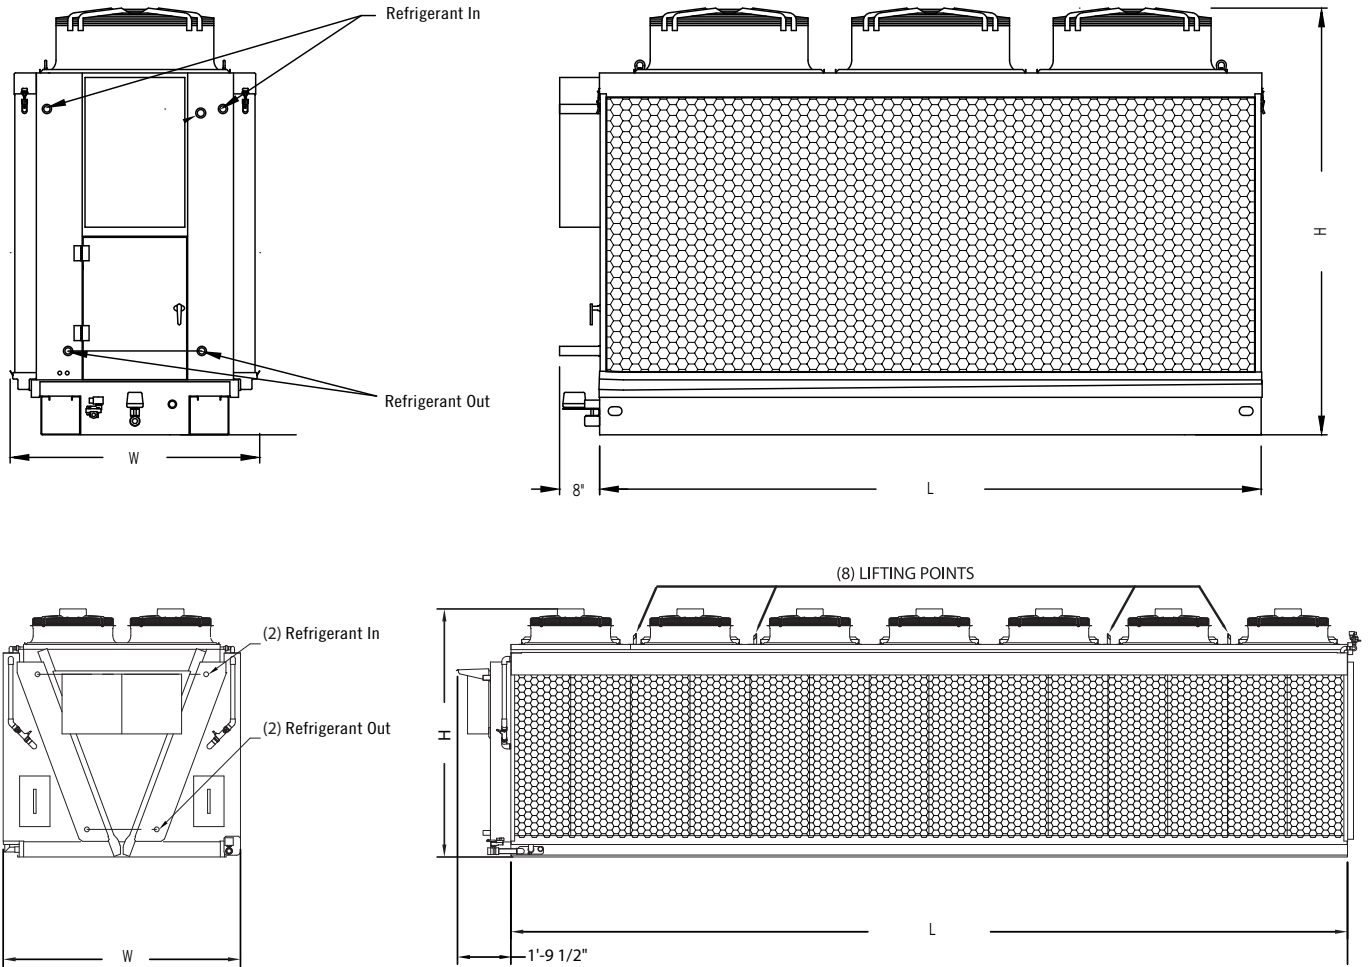

NOTES:

1. Ton range covers NH₃, HFC and CO₂ at a variety of conditions. For specific selections, please contact your local BAC Representative.
2. Pump HP is 0.33.
Units with 8-14 fans have 2 pumps.
3. The water make-up connection is 3/4", drain connection is 1 1/4" or 1 1/2", and overflow connection is 1 1/2".

Do not use for construction. Refer to factory certified dimensions. This catalog includes data current at the time of publication, which should be reconfirmed at the time of purchase. Up-to-date engineering data, free product selection software, and more can be found at www.BaltimoreAircoil.com.