


● BFW BEVELED FOR WELDING

MODEL NO.	APPROX. SHIPPING WEIGHT (LBS)	APPROX. OPERATING WEIGHT (LBS)	F	TOP OF CASING	OVERALL HEIGHT
VFL-072-22M	8755	13555	2'-9 1/4"	6'-10 1/4"	6'-10 1/4"
VFL-072-22N	8755	13555	2'-9 1/4"	6'-10 1/4"	7'-1"
VFL-072-22O	8755	13555	2'-9 1/4"	6'-10 1/4"	7'-1"
VFL-072-22P	8755	13555	2'-9 1/4"	6'-10 1/4"	7'-1"
VFL-072-32N	9920	15190	3'-6 1/2"	7'-8 3/4"	7'-8 3/4"
VFL-072-32O	9920	15190	3'-6 1/2"	7'-8 3/4"	7'-11 1/2"
VFL-072-32P	9920	15190	3'-6 1/2"	7'-8 3/4"	7'-11 1/2"
VFL-072-42N	10950	16590	4'-3 3/4"	8'-4 3/4"	8'-4 3/4"
VFL-072-42O	10950	16590	4'-3 3/4"	8'-4 3/4"	8'-7 1/2"
VFL-072-42P	10950	16590	4'-3 3/4"	8'-4 3/4"	8'-7 1/2"

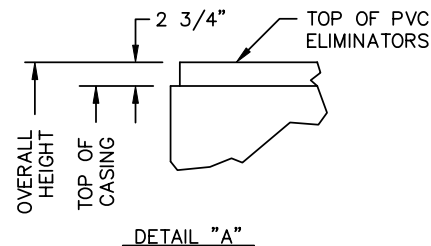

TYPICAL ONLY WHERE OVERALL HEIGHT EXCEEDS TOP OF CASING

- NOTES:
1. ALL DIMENSIONS ARE IN FEET AND INCHES. WEIGHTS ARE IN POUNDS.
 2. UNLESS OTHERWISE INDICATED, ALL CONNECTIONS 6 INCHES AND SMALLER ARE MPT AND CONNECTIONS 8 INCHES AND LARGER ARE BEVELED FOR WELDING.
 3. DIMENSIONS SHOWING LOCATION OF COIL CONNECTIONS ARE APPROXIMATE AND SHOULD NOT BE USED FOR PREFABRICATION OF CONNECTING PIPING.
 4. FOR SUPPORT REQUIREMENTS, REFER TO THE SUGGESTED STEEL SUPPORT DRAWING.

B.A.C. ORDER NO.
DATE



RIGHT HAND UNIT STANDARD OUTLET WITH PUMP
DWG NO. BAC-15868A -